



Yantai Lonreytek Technology Co. Ltd

Web: www.lonreytek.com
Email: Info@lonreytek.com
Tel: 0086 0535-2343399
Address: No.2512-2 No.25 Haigang Road Zhifu District
Yantai City Shandong Province China
Zip 264001

All for Your Easy Daily Life& Business

Portable Air Conditioner

.....

|||||
.....





1091



1. Dual hoses in front, spot cooling



2. For camping tents



3. Cool breeze with only 340w power consumption



4. Digital contro panel

Characteristic

- 3,000 BTU/h cooling capacity.
- Environmental-friendly refrigerant R410a or R290.
- Ideal for office and home use as an air conditioner, a fan or a dehumidifier."
- 2-speed control accessible using panel or remote control.
- High energy efficiency. EER: A class
- Horizontal swing louvers for enhanced cooling performance.
- Virtually no installation necessary.
- Up to 24 hours programmable timer.
- Self-diagnose capability and water-full safety alarm.
- Easy to move around with rolling casters.
- Extensible exhaust hose(up to 1.5 meters).

Functional Parameters

109X Series



1090



1092

Model	FDP09-109X
Voltage/Frequency	220-240V~/50Hz
Cooling Capacity	3000BTU/880 W
Power Input(Cooling)	450 W
Humidity Extraction	0.3 L/h
Air Volume	150 m³/h
Noise Level	≤ 45 dB(A)
Refrigerant	R290
Product Meas.	270 x 270 x 580 mm
Package Meas.	440 x 320 x 650 mm
Loading Qty. (pcs)	20'FCL: 282, 40'FCL: 579, 40'HQFCL: 768
N.W.	15.5 kg
G.W.	17.5 kg

106X



1066



1. Side view



2. Ambient temperature (hidden) display on front, easy to check



3. Digital control panel



4. Rear view

Characteristic

- 5,000 BTU-8,000 BTU/h cooling capacity.
- Environmental-friendly refrigerant R410A or R290.
- Ideal for office and home use as an air conditioner, a fan cooler or a dehumidifier.
- 2-speed control accessible using panel or remote control.
- High energy efficiency.
- Horizontal swing louvers for enhanced cooling performance.
- Virtually no installation necessary.
- Up to 24 hours programmable timer.
- Self-diagnose capability and water-full safety alarm.
- Easy to move around with rolling casters.
- Extendable exhaust hose (up to 1.5 meters).

Functional Parameters

106X Series



1060



1061



1062



1064



1065



Model	FDP15-106X	FDP18-106X	FDP20-106X	FDP23-106X
Voltage/Frequency	220-240V/50Hz			
Cooling Capacity	1500 W/5000 BTU/h	1800 W/6000 BTU/h	2000 W/7000 BTU/h	2300 W/8000 BTU/h
Power Input(Cooling)	575W	750 W	850 W	950 W
EER	2.6	2.6	2.6	2.6
Humidity Extraction	0.5 L/H	0.55 L/H	1 L/H	1.23 L/H
Air Volume	270 m ³ /h			
Noise Level	≤ 54 dB(A)			
Refrigerant	R290/R410A			
Product Meas.	310×310×640 mm			
Package Meas.	372×372×850 mm			
Loading Qty. (pcs)	20'FCL: 180, 40'FCL: 384, 40'HQFCL: 570			
N.W.	19 kg	19.5 kg	21 kg	21.5 kg
G.W.	21 kg	21.5 kg	22 kg	23 kg

202X



2026



1. Digital control panel on front



2. Front view



3. Easy to move along with rolling casters



4. Rear view

Characteristic

- 5,000/7,000/9,000/10,000/ BTU/h cooling capacity.
- Environmental-friendly refrigerant R410a/R290/R32.
- Ideal for office and home use as an air conditioner, a fan or a dehumidifier.
- 2-speed control accessible using panel or remote control.
- High energy efficiency.
- Virtually no installation necessary.
- Up to 24 hours programmable timer.
- Self-diagnose capability and water-full safety alarm.
- Easy to move around with rolling casters.
- Extensible exhaust hose(up to 1.5 meters).
- WIFI function is optional

Functional Parameters

202X Series



2020



2021



2022

	European Market				American Market	
Model	FDP15-202X	FDP(H)20-202X	FDP(H)26-202X	FDP(H)29-202X	FDP(H)23-202X	FDP(H)29-202X
Voltage/Fr	220-240V/50Hz				115V/60Hz	
Cooling Capacity	5000BTU/1500 W	7000BTU/2000 W	9000BTU/2600 W	10000BTU/2900 W	5000BTU/2300 W	6000BTU/2900 W
Heating Capacity	/	5000BTU/1500 W	7000BTU/2000 W	8000BTU/2300 W	/	/
EER(CEER)	2.6	2.6	2.6	2.6	6.10	6.51
Power Input(Cooling)	575W	750 W	950 W	1100 W	900 W	950 W
Power Input(Heating)		600 W	750 W	950 W	/	/
Humidity Extraction	0.5 L/h	0.8 L/h	1.0 L/h	1.1 L/h	27 OZ/h	33.8 OZ/h
Air Volume	270 m³/h				270 m³/h	
Noise Level	≤ 53 dB(A)				≤ 53 dB(A)	
Refrigerant	R290				R410A/R32	
Product Meas.	330×280×685 mm				12×11×27 in	
Package Meas.	373×318×865 mm				15×12×34 in	
Loading Qty. (pcs)	20'FCL: 228, 40'FCL: 458, 40'HQFCL: 680				20'FCL: 228, 40'FCL: 458, 40'HQFCL: 680	
N.W.	18.0 kg	20 kg	21 kg	22 kg	46 Pound	47 Pound
G.W.	20.0 kg	22 kg	23 kg	24kg	51 Pound	52 Pound

202X



2023



1. Digital control panel



2. Front view



3. Side view



4. Rear view

Characteristic

- 5,000/7,000/9,000/10,000/ BTU/h cooling capacity.
- Environmental-friendly refrigerant R410a/R290/R32.
- Ideal for office and home use as an air conditioner, a fan or a dehumidifier.
- 2-speed control accessible using panel or remote control.
- High energy efficiency.
- Virtually no installation necessary.
- Up to 24 hours programmable timer.
- Self-diagnose capability and water-full safety alarm.
- Easy to move around with rolling casters.
- Extensible exhaust hose(up to 1.5 meters).
- WIFI function is optional

Functional Parameters

202X Series



2024



2025



2028

	European Market				American Market	
Model	FDP15-202X	FDP(H)20-202X	FDP(H)26-202X	FDP(H)29-202X	FDP(H)23-202X	FDP(H)29-202X
Voltage/Frequency	220-240V/50Hz				115V/60Hz	
Cooling Capacity	5000BTU/1500 W	7000BTU/2000 W	9000BTU/2600 W	10000BTU/2900 W	5000BTU/2300 W	6000BTU/2900 W
Heating Capacity	/	5000BTU/1500 W	7000BTU/2000 W	8000BTU/2300 W	/	/
EER(CEER)	2.6	2.6	2.6	2.6	6.10	6.51
Power Input(Cooling)	575W	750 W	950 W	1100 W	900 W	950 W
Power Input(Heating)		600 W	750 W	950 W	/	/
Humidity Extraction	0.5 L/h	0.8 L/h	1.0 L/h	1.1 L/h	27 OZ/h	33.8 OZ/h
Air Volume	270 m³/h				270 m³/h	
Noise Level	≤ 53 dB(A)				≤ 53 dB(A)	
Refrigerant	R290				R410A/R32	
Product Meas.	330×280×700 mm				13×11×27 in	
Package Meas.	373×318×880 mm				15×12×34 in	
Loading Qty. (pcs)	20'FCL: 220, 40'FCL: 458, 40'HQFCL: 680				20'FCL: 220, 40'FCL: 458, 40'HQFCL: 680	
N.W.	18.0 kg	20 kg	21 kg	22 kg	46 Pound	47 Pound
G.W.	20.0 kg	22 kg	23 kg	24kg	51 Pound	52 Pound

115X




1150 1151



1. Digital control panel



2. Cool sitting room



3. Air purifier function



4. Remote control

Characteristic

- 9000 BTU/h cooling and heating capacity.
- Environmental-friendly refrigerant R410A or R290.
- Ideal for office and home use as an air conditioner, a fan cooler or a dehumidifier.
- 3-speed control accessible using panel or remote control.
- High energy efficiency EER: A class.
- Horizontal swing louvers for enhanced cooling performance.
- Virtually no installation necessary.
- Up to 24 hours programmable timer.
- Self-diagnose capability and water-full safety alarm.
- Easy to move around with rolling casters.
- Extendable exhaust hose (up to 1.5 meters)
- Optional WIFI function

Functional Parameters

115X Series



1152



1153



Model	FDP26-115X	FDP(H)26-115X
Voltage/Frequency	220-240V/50Hz	
Cooling Capacity	2600 W	2600 W
Heating Capacity	/	2000 W
Power Input(Cooling)	950 W	950 W/
Power Input(Heating)	/	750 W
EER	2.6	2.6
Humidity Extraction	1.2 L/H	
Air Volume	350 m³/h	
Noise Level	≤ 54 dB(A)	
Refrigerant	R290/R410A	
Product Meas.	367×353×684 mm	
Package Meas.	410×410×870 mm	
Loading Qty. (pcs)	20'FCL: 140, 40'FCL: 290, 40'HQFCL: 430	
N.W.	24 kg	25 kg
G.W.	26 kg	27 kg

116X



1160



1. Front view



2. Digital contro panel



3. Easy to clear air filter



4. Rear view

Characteristic

- 7000/9000 BTU/h cooling and heating capacity.
- Environmental-friendly refrigerant R410A or R290.
- Ideal for office and home use as an air conditioner, a fan cooler or a dehumidifier.
- 3-speed control accessible using panel or remote control.
- High energy efficiency EER: A class.
- Horizontal swing louvers for enhanced cooling performance.
- Virtually no installation necessary.
- Up to 24 hours programmable timer.
- Self-diagnose capability and water-full safety alarm.
- Easy to move around with rolling casters.
- Extendable exhaust hose (up to 1.5 meters)
- Optional WIFI function

Functional Parameters

116X Series



1161



1162



Model	FDP20-116X	FDP26-116X
Voltage/Frequency	220-240V/50Hz	
Cooling Capacity	2000 W/7000 BTU/h	2600 W/9000 BTU/h
Power Input(Cooling)	750 W	950 W
EER	2.6	2.6
Humidity Extraction	0.8 L/H	1.0 L/H
Air Volume	300 m ³ /h	
Noise Level	≤ 54 dB(A)	≤ 54 dB(A)
Refrigerant	R290/R410A	
Product Meas.	320×348×680 mm	
Package Meas.	382×410×880 mm	
Loading Qty. (pcs)	20'FCL: 168, 40'FCL: 344, 40'HQFCL: 510	
N.W.	21.5 kg	22 kg
G.W.	24 kg	25 kg

201X



2010



1. Easy to move



2. Extra Ambient Temperature Hidden Display



3. Automatical swing function



4. Swing upto 80° Angle

Characteristic

- 7,000/8,000/9,000/10,000/12,000 BTU/h cooling capacity.
- Environmental-friendly refrigerant R410a/R290/R32
- Ideal for office and home use as an air conditioner, a fan or a dehumidifier."
- 3-speed control accessible using panel or remote control (2010 series).
- 2-speed control accessible using panel or remote control (2011 series).
- High energy efficiency. EER: A class
- Horizontal swing louvers for enhanced cooling performance.
- Virtually no installation necessary.
- Up to 24 hours programmable timer.
- Self-diagnose capability and water-full safety alarm.
- Easy to move around with rolling casters.
- Extensible exhaust hose(up to 1.5 meters).
- Touch control panel (2011 series).
- WIFI function is optional

Functional Parameters

201X Series



2013



2012



	European Market					American Market		
Model	FDP(H)20-201X	FDP(H)23-201X	FDP(H)26-201X	FDP(H)29-201X	FDP(H)35-201X	FDP(H)23-201X	FDP(H)29-201X	FDP(H)35-201X
Voltage/Frequency	220-240V/50Hz					115V/60Hz		
Cooling Capacity	7000BTU /2000 W	8000BTU /2300 W	9000BTU /2600 W	10000BTU /2900W	12000BTU /3500W	5000BTU /2300 W	6000BTU /2900W	8000BTU /3500W
Heating Capacity	5000BTU /1500 W	6000BTU /1800 W	7000BTU /2000 W	7500BTU /2200W	9000BTU /2600W	/	/	9000BTU /2600W
EER(CEER)	2.6	2.6	2.6	2.6	2.6	6.10	6.51	7.22
Power Input(Cooling)	750 W	850 W	950 W	1100 W	1250 W	850 W	1100 W	1250 W
Power Input(Heating)	600 W	650 W	750 W	900 W	1120 W	/	/	1120 W
Humidity Extraction	0.6 L/h	0.9 L/h	1.0 L/h	1.1 L/h	1.2 L/h	33.8 oz/h	37 oz/h	41 oz/h
Air Volume	350 m³/h	350 m³/h	350 m³/h	350 m³/h	350 m³/h	350 m³/h	350 m³/h	350 m³/h
Noise Level	≤ 52 dB(A)					≤ 52 dB(A)		
Refrigerant	R290					R410A/R32		
Product Meas.	355×350×700 mm					14×13.7×27.6 in		
Package Meas.	410×410×880 mm					16.1×15.7×34.6 in		
Loading Qty. (pcs)	20'FCL: 139, 40'FCL: 279, 40'HQFCL: 430					20'FCL: 139, 40'FCL: 279, 40'HQFCL: 430		
N.W.	22.0 kg	22 kg	24 kg	24.50 kg	25.0 kg	55 Pound	59 Pound	64 Pound
G.W.	24.0 kg	24.5 kg	26.0 kg	26.5 kg	27.0 kg	59 Pound	64 Pound	69 Pound

303X



3030



1. Noble display panel with mould-in mould plastic inject technology



2. Front view



3. Easy to move along with rolling casters



4. Comes with power cord hook

Characteristic

- 9,000/10,000/12,000/14,000 BTU/h cooling capacity.
- Environmental-friendly refrigerant R410a/R290/R32.
- Ideal for office and home use as an air conditioner, a fan or a dehumidifier.
- 3-speed control accessible using panel or remote control.
- High energy efficiency. EER: A class
- Horizontal swing louvers for enhanced cooling performance.
- Virtually no installation necessary.
- Up to 24 hours programmable timer.
- Self-diagnose capability and water-full safety alarm.
- Easy to move around with rolling casters.
- Extensible exhaust hose(up to 1.5 meters).
- WIFI function is optional

Functional Parameters

303X Series



3031



3032



3033



3034

	European Market						American Market			
Model	FDP(H)26-303X	FDP(H)29-303X	FDP(H)35-303X	FDP(H)41-303X	FDP(H)35-303X	FDP(H)41-303X	FDP(H)23-303X	FDP(H)29-303X	FDP(H)35-303X	FDP(H)41-303X
Voltage/Frequency	220-240V/50Hz (A class)				220-240V/50Hz (A+ class)		220-240V/50Hz			
Cooling Capacity	9000BTU /2600 W	10000BTU /2900 W	12000BTU /3500 W	14000BTU /4000 W	9000BTU /2600 W	12000BTU /3500 W	5000BTU /2600 W	6000BTU /2900 W	8000BTU /3500 W	9000BTU /4000 W
Heating Capacity	7000BTU /2000 W	8000BTU /2300 W	10000BTU /2700 W	11000BTU /3000 W	7000BTU /2000 W	10000BTU /2700 W	/	/	9500BTU /3000 W	10500BTU /3000 W
Power Input(Cooling)	950 W	1100 W	1300 W	1500 W	950 W	1300 W	950 W	1100 W	1300 W	1500 W
Power Input(Heating)	750 W	950 W	1120 W	1250 W	750 W	1120 W	750 W	950 W	1120 W	1250 W
EER(CEER)	A/2.6	A/2.6	A/2.6	A/2.6	A+/3.1	A+/3.1	6.10	6.51	7.22	7.54
Humidity Extraction	1.0L/h	1.1 L/h	1.2 L/h	1.5 L/h	1.0L/h	1.2 L/h	33.8 oz/h	37 oz/h	40.56 oz/h	50.7 oz/h
Air Volume	400 m³/h	400 m³/h	400 m³/h	400 m³/h	400 m³/h	400 m³/h	400 m³/h	400 m³/h	400 m³/h	400 m³/h
Noise Level	≤ 54 dB(A)				≤ 54 dB(A)		≤ 54 dB(A)			
Refrigerant	R290				R290		R410A/R32			
Product Meas.	440×335×710 mm				440×335×710 mm		17×13×28 in			
Package Meas.	468×378×870 mm				468×378×870 mm		18×15×34 in			
Loading Qty. (pcs)	20'FCL: 138, 40'FCL: 294, 40'HQFCL: 440				138/294/440		20'FCL: 138, 40'FCL: 294, 40'HQFCL: 440			
N.W.	27.5 kg	28.5 kg	29.5 kg	30.5 kg	28.5 kg	29.5 kg	55 Pound	59 Pound	64 Pound	67 Pound
G.W.	29.5 kg	30.5 kg	31.5 kg	33.0 kg	30.5 kg	31.5 kg	59 Pound	64 Pound	69 Pound	73 Pound



Functional Parameters

308X Series



3080



1. Automatical Swing function



2. easy to move along with rolling casters



3. Family look wide capacity ranges 8/9/10/12/14/16/18/20k

Characteristic

- 16000/18000/20000 Btu cooling capacity
- Environmental-friendly refrigerant R410a or R290.
- Ideal for office and home use as an air conditioner, a fan or a dehumidifier.
- 3-speed control accessible using panel or remote control.
- High energy efficiency. EER: A class
- Horizontal swing louvers for enhanced cooling performance.
- Virtually no installation necessary.
- Up to 24 hours programmable timer.
- Self-diagnose capability and water-full safety alarm.
- Easy to move around with rolling casters.
- Extensible exhaust hose(up to 1.5 meters).
- WIFI function is optional

Model	FDP(H)47-308X	FDP(H)53-308X	FDP(H)58-308X
Voltage/Frequency	220-240V/50Hz		
Cooling Capacity	16000BTU/4700 W	18000BTU/5300 W	20000BTU/5800 W
Heating Capacity	16000BTU/4700 W	18000BTU/5300 W	20000BTU/5800 W
Power Input(Cooling)	1800 W	2000 W	2200 W
Power Input(Heating)	1800 W	2000 W	2200 W
EER(CEER)	2.6	2.6	2.6
Humidity Extraction	1.0L/h	1.1 L/h	1.2 L/h
Air Volume	500 m³/h	500 m³/h	500 m³/h
Noise Level	≤ 55 dB(A)		
Refrigerant	R290		
Product Meas.	490×378×770 mm		
Package Meas.	664×407×882 mm		
Loading Qty. (pcs)	20'FCL: 96, 40'FCL: 196, 40'HQFCL: 303		
N.W.	35 kg	38 kg	39 kg
G.W.	39 kg	42 kg	43 kg



Model	FDP(H)20-1080R5	FDP(H)20-1290R5	FDP(H)20-1220R5	FDP(H)35-3010R5
Voltage/Frequency	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Cooling Capacity	2000 W/7000 BTU/h	2000 W/7000 BTU/h	2000 W/7000 BTU/h	12000 BTU/h/3500 W
Heating Capacity	2000 W/7000 BTU/h	2000 W/7000 BTU/h	2000 W/7000 BTU/h	9000 BTU/h/2600 W
Power Input(Cooling)	750 W	750 W	750 W	750 W
Power Input(Heating)	750 W	750 W	750 W	750 W
Humidity Extraction	0.9 L/H	1 L/H	1 L/H	1 L/H
Air Volume	350 m³/h	400 m³/h	400 m³/h	450 m³/h
Noise Level	≤ 52 dB(A)	≤ 52 dB(A)	≤ 52 dB(A)	≤ 54 dB(A)
Refrigerant	R290/R410A	R290/R410A	R290/R410A	R290
Product Meas.	416×300×671 mm	420×305×636 mm	420×305×636 mm	378×405×815 mm
Package Meas.	475×360×880 mm	480×360×850 mm	480×360×850 mm	438×458×1030 mm
Loading Qty. (pcs)	20°FCL: 152, 40°FCL: 314, 40'HQFCL: 471	20°FCL: 140, 40°FCL: 280, 40'HQFCL: 432	20°FCL: 140, 40°FCL: 280, 40'HQFCL: 432	20°FCL: 130, 40°FCL: 270, 40'HQFCL: 270
N.W.	21 kg	21 kg	21 kg	29.5 kg
G.W.	24 kg	24 kg	24 kg	31.5 kg



Model	FDP(H)35-1250R5	FDP(H)35-1251R5	YGP(H)35-1170R5	FDP(H)35-1280R5
Voltage/Frequency	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Cooling Capacity	3500 W	3500 W	3500 W	3500 W
Heating Capacity	3000 W	3000 W	3300 W	3300 W
Power Input(Cooling)	1300 W	1300 W	1300 W	1200 W
Power Input(Heating)	1150 W	1150 W	1250 W	1150 W
Humidity Extraction	1.5 L/H	1.5 L/H	1.9 L/H	1.8 L/H
Air Volume	450 m³/h	450 m³/h	350 m³/h	400 m³/h
Noise Level	≤ 54 dB(A)	≤ 54 dB(A)	≤ 55 dB(A)	≤ 55 dB(A)
Refrigerant	R290/R410A	R290/R410A	R410A	R290/R410A
Product Meas.	375×375×813 mm	380×406×830 mm	386×390×806 mm	387×400×794 mm
Package Meas.	435×435×1023 mm	438×458×1023 mm	466×462×858 mm	460×560×875 mm
Loading Qty. (pcs)	20°FCL: 130, 40°FCL: 270, 40'HQFCL: 270	20°FCL: 130, 40°FCL: 260, 40'HQFCL: 260	20°FCL: 120, 40°FCL: 250, 40'HQFCL: 375	20°FCL: 104, 40°FCL: 208, 40'HQFCL: 312
N.W.	29 kg	30 kg	30 kg	29.5 kg
G.W.	33 kg	33 kg	33 kg	32.5 kg

Dehumidifier



5310 5320



5320



1. Hidden display of room humidity(optional)



2. Half enclosure panel looks novel and unique .



3. Hook for power cord



• Wifi Control optional

Characteristic

- Family look, covering 22/35/50Pint/day (2019 DOE) or 30/50/70L/day(30° RH80%) .
- Energy star certified
- Hidden display of humidity on front panel is optional
- Custom humidity control
- Big water tank,
- Automatic shut off when water tank is full for safety.
- Continuous drainage
- Front loading bucket with carrying handle and splash guard
- Easy-to-clean washable filter
- Quality compressor, environmental-friendly refrigerant R410a or R290.
- Wifi control optional

Functional Parameters

5310、5320 Series



5310



5320

	European Market			American Market		
Model	FDD30-5310	FDD50-5320	FDD70-5320	FDD12-5310	FDD10-5320	FDD12-5320
Voltage/Frequency	220-240v/50Hz			115V/60Hz		
Working Space	30-40 m²	40-50 m²	50-60 m²	1500 sq.ft	3000 sq.ft	4500 sq.ft
Dehumidifying Capacity	30L/D(30°C /RH80%) 15L/D(27°C /RH80%)	50 L/D(30°C /RH80%) 25 L/D(27°C /RH80%)	70L/day(30°C /RH80%) 35L/day(27°C /RH60%)	35P/day(86 °F /RH80%) 22P/day(65 °F /RH60%)	50P/day(86 °F /RH80%) 35P/day(65 °F /RH60%)	70P/day(86 °F /RH80%) 50P/day(65 °F /RH60%)
Noise Level	≤ 50dB(A)	≤ 47dB(A)	≤ 53dB(A)	≤ 47dB(A)	≤ 47dB(A)	≤ 53dB(A)
Water Tank Capacity	3 L	6 L		0.8 gallon	1.6 gallon	
Rated Power	250 W	360 W	515 W	250 W	360 W	515 W
Working Temperature	5-32 °C			41-90 °F		
Air volume	210 m³/h		350 m³/h	135 CFM		165/188 CFM
Product Meas.	260×390×500 mm		280×390×620mm	15.2×10.2×19.7 in		15.4×11×24.3 in
Package Meas.	290×420×550 mm		340×430×670 mm	11.5×16.7×21.7 in		26.38×16.93×13.19 in
Loading Qty(pcs)	20°FCL: 448, 40°FCL: 896, 40'HQFCL: 904		20°FCL: 273, 40°FCL: 550, 40'HQFCL: 752	20°FCL: 448, 40°FCL: 896, 40'HQFCL: 904		20°FCL: 273, 40°FCL: 550, 40'HQFCL: 752
N.W.	14 kg	18 kg	20 kg	31 Pound	40 Pound	43 Pound
G.W.	15.5 kg	20 kg	22 kg	34 Pound	44 Pound	47 Pound

509X



5090



1. Full water indicator



2. Easy to clear air filter



3. Big water tank



4. Continuous drainage

Characteristic

- Easy to carry using handle.
- Extract up to 10/12 liters of water per day.
- Quality compressor, environmental-friendly refrigerant R134a or R290.
- Automatically turns-off when water tank is 2.1L full for safety.
- Up to 24 hours timer.
- Continuous drainage.
- Castor for easy mobility (optional).
- Washable air filter or Activated carbon filter (optional).
- Optional WIFI function

Functional Parameters

519X Series



5091



5092



	European Market		American Market
Model	FDD10-509X	FDD12-509X	FDD12-509X
Voltage/Frequency	220-240V/50Hz		115V/60Hz
Working Space	15-20 m ²		15-20 m ²
Dehumidifying Capacity	10L/day(30°C /RH80%) 5L/day(27°C /RH60%)	12L/day(30°C /RH80%) 6L/day(27°C /RH60%)	25P/day(86 °F /RH80%) 8P/day(65 °F /RH60%)
Noise Level	≤ 45dB(A)		≤ 42dB(A)
Water Tank Capacity	2.0 L		2.0 L
Rated Power	200 W	210 W	135 W
Working Temperature	5-32 °C		41-90 °F
Air volume	120 m ³ /h		100 m ³ /h
Product Meas.	270×205×405.5 mm		10.6×8.1×16.0 in
Package Meas.	310×245×440 mm		12.2×9.6×17.3 in
Loading Qty(pcs)	20'FCL: 865, 40'FCL: 1775, 40'HQFCL: 2130		20'FCL: 865, 40'FCL: 1775, 40'HQFCL: 2130
N.W.	8 kg	9 kg	24 Pound
G.W.	9 kg	10 kg	26 Pound


501X



5010



1. Digital control panel



2. Multilayer air filters optional, HEPA filter, active carton filter, washable nylon filter



3. Size view



4. Double clean face, rear panel also looks nice

Characteristic

- Easy to carry using handle.
- Extract up to 10/12 liters of water per day.
- Quality compressor, environmental-friendly refrigerant R134a or R290.
- Automatically turns-off when water tank is 2.5L full for safety.
- Up to 24 hours timer (Electronic type).
- Continuous drainage.
- Castor for easy mobility (optional).
- Washable air filter or Activated carbon filter or HEPA filter (optional).

Functional Parameters

501X Series



5011

	European Market		American Market
Model	FDD10-501X	FDD12-501X	FDD12-501X
Voltage/Frequency	220-240V/50Hz		115V/60Hz
Working Space	15-20 m ²		15-20 m ²
Dehumidifying Capacity	10L/day(30°C /RH80%) 5L/day(27°C /RH60%)	12L/day(30°C /RH80%) 6L/day(27°C /RH60%)	25P/day(86 °F /RH80%) 8P/day(65 °F /RH60%)
Noise Level	≤ 45dB(A)		≤ 42dB(A)
Water Tank Capacity	2.5 L		2.5 L
Rated Power	200 W	210 W	135 W
Working Temperature	5-32 °C		41-90 °F
Air volume	120 m ³ /h		100 m ³ /h
Product Meas.	290×240×460mm		11.4×9.4×18.1 in
Package Meas.	340×290×528 mm		13.4×11.4×20.8 in
Loading Qty(pcs)	20'FCL: 536, 40'FCL: 1088, 40'HQFCL: 1360		20'FCL: 536, 40'FCL: 1088, 40'HQFCL: 1360
N.W.	9.5 kg	10 kg	22 Pound
G.W.	10.5 kg	11 kg	24 Pound




503X

5037



1. Digital control panel on front



2. Fine texture



3. Big water tank



4. Washable air filter

Characteristic

- Easy to carry using handle.
- Extract up to 10/12 liters of water per day.
- Quality compressor, environmental-friendly refrigerant R134a or R290.
- Automatically turns-off when water tank is 2.2L full for safety.
- Up to 12 hours timer (Electronic type).
- Continuous drainage.
- Castor for easy mobility (optional).
- Washable air filter or Activated carbon filter (optional).

Functional Parameters

503X Series



5030



5031



5035



5036



	European Market		American Market
Model	FDD10-501X	FDD12-501X	FDD12-501X
Voltage/Frequency	220-240V/50Hz		115V/60Hz
Working Space	15-20 m ²		15-20 m ²
Dehumidifying Capacity	10L/day(30°C /RH80%) 5L/day(27°C /RH60%)	12L/day(30°C /RH80%) 6L/day(27°C /RH60%)	25P/day(86 °F /RH80%) 8P/day(65 °F /RH60%)
Noise Level	≤ 45dB(A)		≤ 42dB(A)
Water Tank Capacity	2.2 L		2.2 L
Rated Power	200 W	210 W	135 W
Working Temperature	5-32 °C		41-90 °F
Air volume	120 m ³ /h		100 m ³ /h
Product Meas.	280×240×460mm		11.0×9.4×18.1 in
Package Meas.	315×290×528 mm		12.4×11.4×20.8 in
Loading Qty(pcs)	20°FCL: 576, 40°FCL: 1184, 40'HQFCL: 1480		20°FCL: 576, 40°FCL: 1184, 40'HQFCL: 1480
N.W.	9.5 kg	10 kg	22 Pound
G.W.	10.5 kg	11 kg	24 Pound




1. 3-color environmental humidity numbers and lamp




2. Touch control panel



3. Ultra thin, only 20cm in depth



4. Anion UVC Air purifier function(Optional)



5. Multilayer filters optional, either HEPA filter or active carbon filter extra

5290

Characteristic

- Easy to carry using handle.
- Extract up to 16/20/25 liters of water per day.
- Quality compressor, environmental-friendly refrigerant R134a or R290.
- Automatically turns-off when water tank is 5L full for safety.
- Up to 24 hours timer
- Continuous drainage.
- Castor for easy mobility
- Washable air filter or Activated carbon filter or HEPA filter (optional).

Functional Parameters

529X Series



5291



5292



5293

	European Market			American Market
Model	FDD16-529X	FDD20-529X	FDD25-529X	FDD25-529X
Voltage/Frequency	220-240V/50Hz			115V/60Hz
Working Space	20-25 m ²	20-30 m ²	25-35 m ²	25-35 m ²
Dehumidifying Capacity	16L/day(30°C /RH80%) 8L/day(27°C /RH60%)	20L/day(30°C /RH80%) 10L/day(27°C /RH60%)	25L/day(30°C /RH80%) 13L/day(27°C /RH60%)	50P/day(86 °F /RH80%) 15P/day(65 °F /RH60%)
Noise Level	≤ 42 dB(A)			≤ 42dB(A)
Water Tank Capacity	5.5 L			5.5 L
Rated Power	240 W	320 W	330 W	290 W
Working Temperature	5-32 °C			41-90 °F
Air volume	195 m ³ /h			195 m ³ /h
Product Meas.	355×200×600 mm			13.4×9.4×22.4 in
Package Meas.	385×252×655 mm			15.2×10.4×25.6 in
Loading Qty(pcs)	20'FCL: 443, 40'FCL: 900, 40'HQFCL: 1190			20'FCL: 380, 40'FCL: 770, 40'HQFCL: 1030
N.W.	14 kg	14.5 kg	14.5 kg	32 Pound
G.W.	15 kg	15.5 kg	15.5 kg	34 Pound

525X




5250



1. Multilayer air filters optional, HEPA filter, active carton filter, washable nylon filter



2. Child lock



3. 3-color environmental humidity lamp

Characteristic

- 3-color environmental humidity lamp
- Built in handle, easy to carry.
- Extract up to 16/20/25 liters of water per day.
- Quality compressor, environmental-friendly refrigerant R134a or R290.
- Automatically turns-off when water tank is 6.5L full for safety.
- Automatic defrosting function.
- Up to 24 hours timer.
- Continuous drainage.
- Castor for easy mobility.
- Washable air filter or Activated carbon filter or HEPA filter(optional).

Functional Parameters

525X Series



5251



5252



5253



5254

	European Market			American Market
Model	FDD16-525X	FDD20-525X	FDD25-525X	FDD25-525X
Voltage/Frequency	220-240V/50Hz			115V/60Hz
Working Space	20-25 m ²	20-30 m ²	25-35 m ²	25-35 m ²
Dehumidifying Capacity	16L/day(30°C /RH80%) 8L/day(27°C /RH60%)	20L/day(30°C /RH80%) 10L/day(27°C /RH60%)	25L/day(30°C /RH80%) 13L/day(27°C /RH60%)	50P/day(86 °F /RH80%) 15P/day(65 °F /RH60%)
Noise Level	≤ 48dB(A)			≤ 48dB(A)
Water Tank Capacity	6.5 L			6.5 L
Rated Power	240 W	320 W	330 W	290 W
Working Temperature	5-32 °C			41-90 °F
Air volume	195 m ³ /h			195 m ³ /h
Product Meas.	340×240×570mm			13.4×9.4×22.4 in
Package Meas.	385×272×650 mm			15.2×10.8×25.6 in
Loading Qty(pcs)	20'FCL: 380, 40'FCL: 770, 40'HQFCL: 1030			20'FCL: 380, 40'FCL: 770, 40'HQFCL: 1030
N.W.	14 kg	14.5 kg	14.5 kg	32 Pound
G.W.	15 kg	15.5 kg	15.5 kg	34 Pound

525X



5258



1. Multilayer air filters optional, HEPA filter, active carton filter, washable nylon filter



2. Big water tank 6.5 Liter



3. 3-color environmental humidity lamp

Characteristic

- 3-color environmental humidity lamp
- Built in handle, easy to carry.
- Extract up to 16/20/25 liters of water per day.
- Quality compressor, environmental-friendly refrigerant R134a or R290.
- Automatically turns-off when water tank is 6.5L full for safety.
- Automatic defrosting function.
- Up to 24 hours timer.
- Continuous drainage.
- Castor for easy mobility.
- Washable air filter or Activated carbon filter or HEPA filter(optional).

Functional Parameters

525X Series



5255



5256



5257



	European Market			American Market
Model	FDD16-525X	FDD20-525X	FDD25-525X	FDD25-525X
Voltage/Frequency	220-240V/50Hz			115V/60Hz
Working Space	20-25 m ²	20-30 m ²	25-35 m ²	25-35 m ²
Dehumidifying Capacity	16L/day(30°C /RH80%) 8L/day(27°C /RH60%)	20L/day(30°C /RH80%) 10L/day(27°C /RH60%)	25L/day(30°C /RH80%) 13L/day(27°C /RH60%)	50P/day(86 °F /RH80%) 15P/day(65 °F /RH60%)
Noise Level	≤ 48dB(A)			≤ 48dB(A)
Water Tank Capacity	6.5 L			6.5 L
Rated Power	240 W	320 W	330 W	290 W
Working Temperature	5-32 °C			41-90 °F
Air volume	195 m ³ /h			195 m ³ /h
Product Meas.	340×240×570mm			13.4×9.4×22.4 in
Package Meas.	385×272×650 mm			15.2×10.8×25.6 in
Loading Qty(pcs)	20'FCL: 380, 40'FCL: 770, 40'HQFCL: 1030			20'FCL: 380, 40'FCL: 770, 40'HQFCL: 1030
N.W.	14 kg	14.5 kg	14.5 kg	32 Pound
G.W.	15 kg	15.5 kg	15.5 kg	34 Pound

525X



525B



1. Multilayer air filters optional, HEPA filter, active carton filter, washable nylon filter



2. Big water tank 6.5 Liter



3. 3-color environmental humidity lamp

Characteristic

- 3-color environmental humidity lamp
- Built in handle, easy to carry.
- Extract up to 16/20/25 liters of water per day.
- Quality compressor, environmental-friendly refrigerant R134a or R290.
- Automatically turns-off when water tank is 6.5L full for safety.
- Automatic defrosting function.
- Up to 24 hours timer.
- Continuous drainage.
- Castor for easy mobility.
- Washable air filter or Activated carbon filter or HEPA filter(optional).

Functional Parameters

525X Series



525B

	European Market			American Market
Model	FDD16-525X	FDD20-525X	FDD25-525X	FDD25-525X
Voltage/Frequency	220-240V/50Hz			115V/60Hz
Working Space	20-25 m ²	20-30 m ²	25-35 m ²	25-35 m ²
Dehumidifying Capacity	16L/day(30°C /RH80%) 8L/day(27°C /RH60%)	20L/day(30°C /RH80%) 10L/day(27°C /RH60%)	25L/day(30°C /RH80%) 13L/day(27°C /RH60%)	50P/day(86 °F /RH80%) 15P/day(65 °F /RH60%)
Noise Level	≤ 48dB(A)			≤ 48dB(A)
Water Tank Capacity	6.5 L			6.5 L
Rated Power	240 W	320 W	330 W	290 W
Working Temperature	5-32 °C			41-90 °F
Air volume	195 m ³ /h			195 m ³ /h
Product Meas.	340×240×570mm			13.4×9.4×22.4 in
Package Meas.	385×272×650 mm			15.2×10.8×25.6 in
Loading Qty(pcs)	20'FCL: 380, 40'FCL: 770, 40'HQFCL: 1030			20'FCL: 380, 40'FCL: 770, 40'HQFCL: 1030
N.W.	14 kg	14.5 kg	14.5 kg	32 Pound
G.W.	15 kg	15.5 kg	15.5 kg	34 Pound

516X



5167



1. 3-color environmental humidity lamp



2. Big water tank 5.5 liters



3. Contious drainage



4. Easy to move along with rolling casters

Characteristic

- Compact, highly efficient, portable dehumidifier.
- Easy to carry using handle.
- Extract up to 16/20 liters of water per day.
- Quality compressor, environmental-friendly refrigerant R134a or R290.
- Automatically turns-off when water tank is 5.5L full for safety.
- Automatic defrosting function.
- Up to 12 hours timer.
- Adjustable air outlet.
- Continuous drainage.
- Castor for easy mobility.
- Washable air filter or Activated carbon filter (optional).

Functional Parameters

516X Series



5160



5161



5165



5162



5166

	European Market			American Market
Model	FDD16-516X	FDD20-516X	FDD25-516X	FDD25-516X
Voltage/Frequency	220-240V/50Hz			115V/60Hz
Working Space	20-25 m ²	20-30 m ²	25-35 m ²	25-35 m ²
Dehumidifying Capacity	16L/day(30°C /RH80%) 8L/day(27°C /RH60%)	20L/day(30°C /RH80%) 10L/day(27°C /RH60%)	25L/day(30°C /RH80%) 13L/day(27°C /RH60%)	50P/day(86 °F /RH80%) 15P/day(65 °F /RH60%)
Noise Level	≤ 48dB(A)			≤ 48dB(A)
Water Tank Capacity	5.5L			5.5 L
Rated Power	240 W	320 W	330 W	290 W
Working Temperature	5-32 °C			41-90 °F
Air volume	195 m ³ /h			195 m ³ /h
Product Meas.	340×210×550mm			13.4×8.3×21.7 in
Package Meas.	385×252×655 mm			15.2×9.9×25.8 in
Loading Qty(pcs)	20'FCL: 396, 40'FCL: 819, 40'HQFCL: 1087			20'FCL: 396, 40'FCL: 819, 40'HQFCL: 1087
N.W.	14 kg	14.5 kg	14.5 kg	32 Pound
G.W.	15 kg	15.5 kg	15.5 kg	34 Pound



1. Multilayer air filters optional, HEPA filter, active carbon filter, washable nylon filter



2. Contious drainage optional



3. 3-color environmental humidity lamp



4. Easy to move handle

Characteristic

- 3-color environmental humidity lamp
- Easy to carry using handle.
- Extract up to 16/20/25 liters of water per day.
- Quality compressor, environmental-friendly refrigerant R134a or R290.
- Automatically turns-off when water tank is 3.5L full for safety.
- Continuous drainage.
- Castor for easy mobility
- Washable air filter or Activated carbon filter or HEPA filter (optional).
- Touch control.

Functional Parameters

506X 208X Series



5061

5081

5062

5082

	European Market			American Market
Model	FDD10-508X	FDD12-508X	FDD16-508X	FDD12-508X
Voltage/Frequency	220-240V/50Hz			115V/60Hz
Working Space	15-20 m ²	15-20 m ²	20-25 m ²	15-20 m ²
Dehumidifying Capacity	10L/day(30°C /RH80%) 5L/day(27°C /RH60%)	12L/day(30°C /RH80%) 6L/day(27°C /RH60%)	16L/day(30°C /RH80%) 8L/day(27°C /RH60%)	25P/day(86 °F /RH80%) 8P/day(65 °F /RH60%)
Noise Level	≤ 42dB(A)			≤ 42dB(A)
Water Tank Capacity	2.5 L			2.5 L
Rated Power	200 W	210 W	240 W	135 W
Working Temperature	5-32 °C			41-90 °F
Air volume	120 m ³ /h	120 m ³ /h	130 m ³ /h	120 m ³ /h
Product Meas.	250×250×460 mm			9.8×9.8×18.1 in
Package Meas.	284×284×528 mm			11.2×11.2×20.8 in
Loading Qty(pcs)	20'FCL: 640, 40'FCL:1310, 40'HQFCL: 1310			20'FCL: 640, 40'FCL:1310, 40'HQFCL: 1310
N.W.	9.5 kg	11 kg	11 kg	22 Pound
G.W.	10.5 kg	12 kg	12 kg	24 Pound



508X
506X

5066

5086



1. Multilayer air filters optional, HEPA filter, active carbon filter, washable nylon filter



2. Contious drainage optional



3. Dital control panel



4. 3-color environmental humidity lamp

Characteristic

- 3-color environmental humidity lamp
- Easy to carry using handle.
- Extract up to 16/20/25 liters of water per day.
- Quality compressor, environmental-friendly refrigerant R134a or R290.
- Automatically turns-off when water tank is 3.5L full for safety.
- Continuous drainage.
- Castor for easy mobility
- Washable air filter or Activated carbon filter or HEPA filter (optional).
- Touch control.

Functional Parameters

506X 208X Series



5063

5083

5084

5085

	European Market			American Market
Model	FDD16-506X	FDD20-506X	FDD25-506X	FDD25-506X
Voltage/Frequency	220-240V/50Hz			115V/60Hz
Working Space	20-25 m ²	20-30 m ²	25-35 m ²	25-35 m ²
Dehumidifying Capacity	16L/day(30°C /RH80%) 8L/day(27°C /RH60%)	20L/day(30°C /RH80%) 10L/day(27°C /RH60%)	25L/day(30°C /RH80%) 13L/day(27°C /RH60%)	50P/day(86 °F /RH80%) 15P/day(65 °F /RH60%)
Noise Level	≤ 48dB(A)			≤ 48dB(A)
Water Tank Capacity	3.5 L			3.5 L
Rated Power	240 W	320 W	330 W	290 W
Working Temperature	5-32 °C			41-90 °F
Air volume	190 m ³ /h			195 m ³ /h
Product Meas.	262×262×618 mm			10.3×10.3×24.3 in
Package Meas.	312×312×690 mm			12.3×12.3×27.2 in
Loading Qty(pcs)	20'FCL: 378, 40'FCL: 777, 40'HQFCL: 777			20'FCL: 378, 40'FCL: 777, 40'HQFCL: 777
N.W.	13 kg	13.5 kg	14 kg	32 Pound
G.W.	14 kg	14.2 kg	15 kg	34 Pound

518X



5180



1. 3-color environmental humidity lamp



2. Touch Control panel, hidden display, easy to see humidity on front



3. Double clean face, rear panel also looks nice



4. Contious drainage optional

Characteristic

- Compact, highly efficient, portable dehumidifier.
- Easy to carry using handle.
- Extract up to 10/12/16 liters of water per day.
- Quality compressor, environmental-friendly refrigerant R134a or R290.
- Automatically turns-off when water tank is 2L full for safety.
- Automatic defrosting function.
- Up to 24 hours timer.
- Adjustable air outlet.
- Continuous drainage.
- Castor for easy mobility.
- Washable air filter or Activated carbon filter (optional).

Functional Parameters

503X Series



5181

	European Market			American Market
Model	FDD10-518X	FDD12-518X	FDD16-518X	FDD12-518X
Voltage/Frequency	220-240V/50Hz			115V/60Hz
Working Space	15-20 m²	15-20 m²	20-25 m²	15-20 m²
Dehumidifying Capacity	10L/day(30°C /RH80%) 5L/day(27°C /RH60%)	12L/day(30°C /RH80%) 6L/day(27°C /RH60%)	16L/day(30°C /RH80%) 8L/day(27°C /RH60%)	25P/day(86 °F /RH80%) 8P/day(65 °F /RH60%)
Noise Level	≤ 45dB(A)			≤ 45dB(A)
Water Tank Capacity	2.0 L			2.0 L
Rated Power	200 W	210 W	240 W	210 W
Working Temperature	5-32 °C			41-90 °F
Air volume	120 m³/h			120 m³/h
Product Meas.	280×200×490mm			11.0×7.9×19.3 in
Package Meas.	315×244×528 mm			12.4×9.6×20.8 in
Loading Qty(pcs)	20'FCL: 672, 40'FCL: 1400, 40'HQFCL: 1743			20'FCL: 672, 40'FCL: 1400, 40'HQFCL: 1743
N.W.	9.5 kg	11 kg	11 kg	22 Pound
G.W.	10.5 kg	12 kg	12 kg	24 Pound



	European Market	American Market
Model	YGD20-5220R2	YGD20-5220R2
Voltage/Frequency	220-240V/50Hz	115V/60Hz
Working Space	20-30 m ²	25-35 m ²
Dehumidifying Capacity	20L/day(30°C /RH80%), 12L/day(27°C /RH60%)	50P/day(86 °F /RH80%) 15P/day(65 °F /RH60%)
Noise Level	≤ 48 dB(A)	≤ 48dB(A)
Water Tank Capacity	5.5 L	5.5 L
Rated Power	400 W	400 W
Working Temperature	5-32 °C	41-90 °F
Air volume	180 m ³ /h	180 m ³ /h
Product Meas.	370×270×570 mm	14.6×10.6×22.4 in
Package Meas.	415×324×660 mm	16.3×12.8×26.0 in
Loading Qty(pcs)	20'FCL: 273, 40'FCL: 580, 40'HQFCL: 784	20'FCL: 273, 40'FCL: 580, 40'HQFCL: 784
N.W.	12.5 kg	28 Pound
G.W.	14.5 kg	32 Pound



Characteristic

- Easy to carry pull-up handle.
- Extract up to 20 liters of water per day.
- Quality compressor, Environmental-friendly refrigerant R134a.
- Water level detection and automatically shut-off when water tank is 5.5L full
- Up to 24 hours time.
- Adjustable air outlet.
- Automatic defrosting function.
- Optional continuous drainage.
- Easy to carry and empty water tank using handle.
- Activated carbon and washable air filter.

	European Market	American Market
Model	FDD30-5190BR5	FDD30-5190BR5
Voltage/Frequency	220-240V/50Hz	115V/60Hz
Working Space	30-40 m ²	30-40 m ²
Dehumidifying Capacity	30L/day(30°C /RH80%) 15L/day(27°C /RH60%)	35P/day(86 °F /RH80%) 22P/day(65 °F /RH60%)
Noise Level	≤ 51 dB(A)	≤ 51 dB(A)
Water Tank Capacity	4 L	4 L
Rated Power	540 W	540 W
Working Temperature	5-32 °C	41-90 °F
Air volume	210 m ³ /h	210 m ³ /h
Product Meas.	370×250×585 mm	14.6×9.8×23.0 in
Package Meas.	428×307×635 mm	16.9×12.1×25.0 in
Loading Qty(pcs)	20'FCL: 324, 40'FCL: 663, 40'HQFCL: 852	20'FCL: 324, 40'FCL: 663, 40'HQFCL: 852
N.W.	18 kg	40 Pound
G.W.	20 kg	44 Pound



Characteristic

- Compact, highly efficient, portable dehumidifier.
- Extract up to 30 liters of water per day.
- Quality compressor, environmental-friendly refrigerant R134a or R290.
- Automatically turns-off when water tank is 4L full for safety.
- Automatic defrosting function.
- Up to 24 hours timer.
- Install water pump, automatic drainage, within 8 meter of lift also (optional)
- Castor for easy mobility.
- Washable air filter or Activated carbon filter or HEPA filter (optional).



	European Market		American Market	
Model	FDD50-526X	FDD70-526X	FDD50-526X	FDD70-526X
Voltage/Frequency	220-240V/50Hz		115V/60Hz	
Working Space	40-50 m ²	50-60 m ²	40-50 m ²	50-60 m ²
Dehumidifying Capacity	50L/day(30°C / RH80%) 27L/day(27°C / RH60%)	70L/day(30°C / RH80%) 40L/day(27°C / RH60%)	100P/day(86 °F / RH80%) 50P/day(65 °F / RH60%)	120P/day(86 °F / RH80%) 60P/day(65 °F / RH60%)
Noise Level	≤ 47 dB(A)		≤ 47 dB(A)	
	8.5 L		8.5 L	
Rated Power	590 W	750 W	590 W	750 W
Working Temperature	5-32 °C		41-90 °F	
Air volume	350 m ³ /h		350 m ³ /h	
Product Meas.	320×460×680 mm		12.6×18.1×12.8 in	
Package Meas.	375×515×825 mm		14.8×20.3×32.5 in	
Loading Qty(pcs)	20'FCL: 132, 40'FCL: 282, 40'HQFCL: 420		20'FCL: 132, 40'FCL: 282, 40'HQFCL: 420	
N.W.	23.5 kg	27 kg	52 Pound	60 Pound
G.W.	26 kg	29 kg	57 Pound	64 Pound



TOP VIEW (5261)



5260

Characteristic

- Compact, highly efficient, portable dehumidifier.
- Extract up to 50 liters of water per day.
- Quality compressor, environmental-friendly refrigerant R410a or R290.
- Automatically turns-off when water tank is 8.5L full for safety.
- Automatic defrosting function.
- Up to 24 hours timer.
- Install water pump, automatic drainage, within 8 meter of lift also (optional)
- Castor for easy mobility.
- Washable air filter or Activated carbon filter or HEPA filter (optional).
- WIFI function(optional)

Functional Parameters

Classic Series



5171



5172



5040



5020

Model	FDD20-517X	FDD30-5040BR5	FDD30-5020BR5
Voltage/Frequency	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Working Space	15-20 m ²	30-50 m ²	30-50 m ²
Dehumidifying Capacity	20L/day(30°C /RH80%) 10L/day(27°C /RH60%)	30L/day(30°C /RH80%) 16L/d ay(27°C /RH60%)	30L/day(30°C /RH80%) 16L/d ay(27°C /RH60%)
Noise Level	≤ 48 dB(A)	≤ 48 dB(A)	≤ 48 dB(A)
Water Tank Capacity	2.5 L	5.5 L	5.5 L
Rated Power	340 W	360 W	360 W
Working Temperature	5-32 °C	5-32 °C	5-32 °C
Air volume	180 m ³ /h	195 m ³ /h	195 m ³ /h
Product Meas.	223×358×541 mm	370×270×570 mm	370×270×570 mm
Package Meas.	403×265×584 mm	415×324×660 mm	415×324×660 mm
Loading Qty(pcs)	20'FCL: 470, 40'FCL: 985, 40'HQFCL: 985	20'FCL: 273, 40'FCL: 580, 40'HQFCL: 784	20'FCL: 273, 40'FCL: 580, 40'HQFCL: 784
N.W.	13 kg	15.1 kg	15.1 kg
G.W.	14 kg	16.1kg	16.1kg

SD0X

Semiconductor Condensation
Dehumidifier



SD03



1. 3-color environmental humidity lamp



2. LCD display



3. Easy to change air filter

Characteristic

- Efficient dehumidification, up to 450 ml per day.
- Lightweight and compact, ideal for small spaces.
- Automatically turn-off when water tank is full.

Functional Parameters

SD0X Series



SD01



SD02



SD04

Model	SD01	SD02	SD03	SD04
Voltage/Frequency	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz	220-240V/50Hz
Working Space	10 m ²	10 m ²	10 m ²	10 m ²
Dehumidifying Capacity	600 ml/day(30°C /RH80%)	250 ml/day(30°C /RH80%)	450 ml/day(30°C /RH80%)	250 ml/day(30°C /RH80%)
Noise Level	≤ 35 dB(A)	≤ 35 dB(A)	≤ 35 dB(A)	≤ 35 dB(A)
Rated Power	90 W	30 W	70 W	30 W
Working Temperature	5-40 °C	5-42 °C	5-42 °C	5-42 °C
Air volume	40 m ³ /h	50 m ³ /h	80 m ³ /h	50 m ³ /h
Product Meas.	170×140×245 mm	130×105×320 mm	230×120×380 mm	170×170×220 mm
Package Meas.	507×472×362 mm	110×515×660 mm	265×155×430 mm	630×630×680 mm
Loading Qty(pcs)	20'FCL: 306, 40'FCL: 612, 40'HQFCL: 712	20'FCL: 177, 40'FCL: 369, 40'HQFCL: 487	20'FCL: 1632, 40'FCL: 3369, 40'HQFCL: 3864	20'FCL: 177, 40'FCL: 369, 40'HQFCL: 487
Qty/CTN	6 pcs	18 pcs	1 pcs	18 pcs
N.W.	2.2 kg	1 kg	2.5 kg	1 kg
G.W.	16.2 kg	1.3 kg	2.8 kg	1.3 kg



Model	FD90-6010	FD138-6010
Voltage/Frequency	220-240V/50Hz	
Dehumidifying Capacity	90 L/day	138 L/day
Working Space	80-120 m3	100-150 m3
Rated Power	1000 W	1150 W
Max Power	1400 W	1700 W
Dehumidifying Capacity(27°C /RH60%)	1.83 kg/h	2.33 kg/h
Dehumidifying Capacity(30°C /RH80%)	3.75 kg/h	5.75 kg/h
N.W.	45 kg	65 kg
Product Meas.	592×535×905 mm	



Characteristic

- Extract up to 90L / 138L of water per day.
- Use metal casing
- Quality compressor.
- Low noise.

Model	FD168-6040	FD240-6020	FD240-6030
Voltage/Frequency	220-240V/50Hz	380V3N/50Hz	380V3N/50Hz
Dehumidifying Capacity	168 L/day	240 L/day	480 L/day
Working Space	150-200 m²	200-300 m²	400-700 m²
Rated Power	2000 W	2600 W	5300 W
Max Power	2700 W	4100 W	8000 W
Dehumidifying Capacity(27°C /RH60%)	3.54 kg/h	5.83 kg/h	11.66 kg/h
Dehumidifying Capacity(30°C /RH80%)	7 kg/h	10 kg/h	20 kg/h
N.W.	87 kg	130 kg	240 kg
Product Meas.	650×430×1550 mm	500×750×1670 mm	1185×505×1650 mm



Characteristic

- Extract up to 168L / 240L / 480L of water per day.
- Use metal casing
- Quality compressor.



Other Products



Model	FDD360-6030R4	FDD480-6030R4
Voltage/Frequency	380V3N/50Hz	
Dehumidifying Capacity	360 L/day	480 L/day
Working Space	400-550 m ³	550-800 m ³
Rated Power	4500 W	5300 W
Max Power	/	8000 W
Dehumidifying Capacity(27°C /RH60%)	360 L/h	480 L/h
Dehumidifying Capacity(30°C /RH80%)	15 kg/h	20 kg/h
N.W.	250 kg	300 kg
Product Meas.	1185×500×1630 mm	



- Characteristic
- Extract up to 360L / 480L of water per day.
 - Use metal casing
 - Quality compressor.





Model	AC02(M)
Voltage/Frequency	220-240V/50Hz
Rated Power	Cooling: 50 W
Water Tank Capacity	4.6 liters
Air volume	300 m³/h
Product Meas.	300×240×630 mm
Package Meas.	330×273×695 mm
Loading Qty(pcs)	20'FCL: 448, 40'FCL: 1008, 40'HQFCL: 1092
Qty/CTN	1
N.W. kg	3.4 kg
G.W. kg	4 kg



Characteristic

- 3 in 1 air cooler , humidifier and air purifier.
- Nordic logs evaporator , lcy clean.
- New design of the arc top look stylish compact.
- Automatic sweep the wind blowing a wider range.
- 7.5 hours timer (Electronic type).
- 3 air volume.
- Special wheels for easy mobility.

Model	YGAC01(M)
Voltage/Frequency	220-240V/50Hz
Rated Power	Cooling: 70 W
Anion Amount	2×10 ⁶ n/cm ³
Water Tank Capacity	4 liters
Air volume	300 m³/h
Product Meas.	200×324×634 mm
Package Meas.	372×252×670 mm
Loading Qty(pcs)	20'FCL: 470, 40'FCL: 978, 40'HQFCL: 1030
Qty/CTN	1
N.W. kg	5 kg
G.W. kg	6 kg





Characteristic

- 3 in 1 air cooler , humidifier and air purifier.
- Nordic logs evaporator , lcy clean.
- New design of the arc top look stylish compact.
- Anion , bringing fresh and natural air(optional).
- Automatic sweep the wind blowing a wider range.
- 2 hours timer switch 3 air volume.
- Special wheels for easy mobility.




Model	KJ300-A01
Pwer/Frequency	220-240V/50HZ
Rated Power	33W
CADR	300 m³/h
Airflow	300 dB(A)
Noise	33/61 %H
Bacteria removal rate	99.9%
Working Space	≤ 26 m²
Net Weight Kg	4.3 Kg
Gross Weight Kg	5.2 Kg
Product Meas. (W*D*H)	245×245×530 mm
Package Meas. (W*D*H)	285×285×580 mm
Loading (40"HQ)	1472 pcs

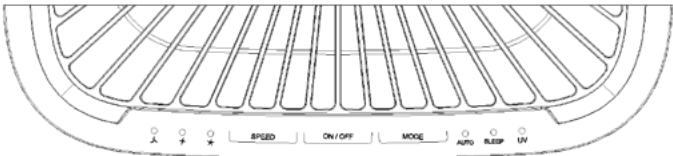

Characteristic

- Compact Design - A modern and compact design, able to adapt to your domestic environment. Very light and easy to move anywhere at home.
- Allergy and asthma friendly - Air quality is effectively improved also in case of specific needs related to allergy and asthma thanks to the most common allergens reduction
- Three-in-one filtration system - Breathe in clean air, thanks to the the three-in-one filter system that captures and effectively absorbs harmful gas, odor and allergens
- Intuitive user Interface - A modern and intuitive touch user interface, providing a smooth, effortless user experience.
- Auto function - Your product measures indoor air quality and automatically adjusts its settings for effective purification.

Model	FDZ12-8010	FDZ12-8010S (Silvery)
Voltage/Frequency	220-240V/50Hz	220-240V/50Hz
Ice making capacity	12kg/24h	12kg/24h
Currency/Power	0.8A/110W	0.8A/110W
Refrigerant/Weight	R600a/22g	R600a/22g
Climate type	SN/N/ST	SN/N/ST
Making ice lead time(ambient temperature 28°C)	8min	8min
water tank capacity	1.3L	1.3L
Ice bucket volume	63pcs	63pcs
Noise	40dB(A)	40dB(A)
Starnd-by power	<0.5W	<0.5W
Unit running Climate	5-38°C	5-38°C
Water-shortage alarm	YES	YES
Ice full alarm	YES	YES
Automatic cleaning function	YES	YES
water feeding type	Manual	Manual
Net Weight	6.0KG	6.5
Gross Weight	7.0KG	7.5
Product dimension	303×228×290mm	303×228×290mm
Package dimension	343×266×330mm	343×266×330mm
Loading qty.	964/2040/2332 Pcs	964/2040/2332 Pcs



Characteristic

- FAST ICE MAKING
The ice machine countertop is capable of producing 9 bullet shaped ice in 6-8 minutes, up to 26 lbs ice in 24 hours with a 6 cup water tank. High quality copper aluminum with R600a refrigerant ensures the ice cube maker a fast cooling effect at low power consumption and low noise.
- PORTABLE SLEEK DESIGN Get ice whenever you need it. This small and portable ice machine for home can fit on any countertop with its slim body of 303*228*290mm. Plus, each ice maker comes with drain hole, a basket and a scoop, convenient for you and your guests.
- L & S BULLET SHAPED ICE Made from food grade PP materials, our ice maker can offer higher quality ice for you and the multifunctional panel of the ice making machine is an awesome design. You can select between small or large ice cube for your need.
- SMART OPERATION
The countertop ice maker is very easy to clean with its self-cleaning function and bottom hole function for draining. There is also a thoughtful reminder of "ICE FULL" and "ADD WATER" indicating lights on the panel.

HELP YOU MOVE
TOWARDS SMART LIFE

EMPOWER YOUR
SMART BUSINESS

